## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 24 June 2004 (24.06.2004)

**PCT** 

## (10) International Publication Number WO 2004/052463 A1

(51) International Patent Classification7: 9/00, 11/00

A62B 7/14,

(21) International Application Number:

PCT/IB2003/005838

(22) International Filing Date:

11 December 2003 (11.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/433,350

12 December 2002 (12.12.2002)

(71) Applicant and

- (72) Inventor: BASSOVITCH, Oleg [AU/AU]; Biomedtech Australia Pty Ltd, 17 Roberna Street, Moorabbin, VIC 3189 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## **Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: BREATHING APPARATUS FOR HYPOXIC PRE-ACCLIMATIZATION AND TRAINING

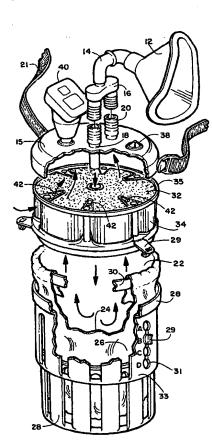

(57) Abstract: A hand-held rebreather/breathing apparatus for high altitude preacclimatization and training. Air exhaled by a user is directed to a reservoir bag for cooling and condensate collection. At inhalation negative pressure created a mixing chamber forces the air stored in the reservoir bag to pass via CO2 absorption chamber where it may be mixed with a fresh portion of the ambient air that influxes via orifice(s) communicating with this chamber. Baseline of the minimum oxygen concentration in inspired air can be pre-set by means of adjustment of the maximum volume of the reservoir bag and/or by means of altering of the number or diameter of one or a plurality of orifices for commination of the ambient air. Biofeedback may be provided by an oxygen monitor.